

The background of the advertisement is a scenic landscape. In the foreground, a waterfall cascades down a rocky ledge, creating white foam and splashing water. The water is a deep blue color. In the background, there are rolling hills and mountains under a clear sky. The overall color palette is dominated by blues, whites, and earthy tones.

AQUASTIC[®]

100% Safe Drinking Water

Drink Water For A Healthy Lifestyle

**4500 TDS
80 GPD | 100 GPD**



- Special Ovary High TDS Membrane
- Membrane Sheet Made in USA
- Hi flow - Long life



MEMBRANE

80 GPD | 100 GPD

REJECTION
96%

TDS
2000

50 PCS MASTER BOX



MEMBRANE

80 GPD | 100 GPD



REBORN



MEMBRANE

80 GPD | 100 GPD | 120 GPD
3000 TDS



100 GPD PRO



Working Pressure : 85 + 7 PSI

Inlet Pressure : 20 Psi

Suction Height : 3 Mtr.

Open Flow : 2000 ML/MIN.

Weight : 2 Kg.

Maximum Current : 1.5 AMP

Voltage : 24v DC



AQUASTIC
100% Safe Drinking

AS-2022-100 GPD

VOLTS : 24V±
MAXIMUM CURRENT : 1.3A±0.1
WORKING CURRENT : 1.1A±0.1
INLET PRESSURE : 0 TO 30 PSI
SUITABLE WATER TEMPERATURE : 5C-45C
SELF SUCTION HEIGHT : 2 METER
WORKING PRESSURE : 100 PSI
MAX. PRESSURE : 130±10 PSI
OPEN FLOW : 2.0 LPM

AQUASTIC
PRO

5G - 100 GPD



Working Pressure : 90+ PSI

Inlet Pressure : 20 Psi

Suction Height : 3 Mtr.

Open Flow : 2000 ML/MIN.

Weight : 1.8 Kg

Maximum Current : 1.5 AMP

Voltage : 24v DC

★★★★ **1** ★★★★★
YEAR WARRANTY

100 GPD LITE



Working Pressure : 85 Psi

Max. Pressure : 125 Psi

Suction Height : 2 Mtr.

Open Flow : 1800 ML/MIN.

Max. AMP : 1.4

Working AMP : 1.2

Voltage : 24v DC

★★★★★ **1** ★★★★★
YEAR WARRANTY

BP 100 GPD

Working Pressure : 95 Psi

Max. Pressure : 125 Psi

Suction Height : 2 Mtr.

Open Flow : 2 Lpm

Max. AMP : 1.5

Working AMP : 1.2

Voltage : 24v DC



BIOPLUS

We Believe In Quality

BOOSTER PUMP

BP 100 GPD

SPECIFICATIONS

Working Pressure	: 90 PSI	Max. AMP	: 1.2
Max. Pressure	: 125 PSI	Working AMP	: 1
Suction Height	: 2 MTR.	Voltage	: 24 VDC
Open Flow	: 2.5 LPM		

DIAPHRAGM BOOSTER PUMP IS DESIGNED FOR
REVERSE OSMOSIS WATER PURIFICATION TECHNOLOGY.

M.R.P. Rs. 3499

★★★★★

1

YEAR WARRANTY

300 GPD Pump



AQUASTIC
100% Safe Drinking Water
BOOSTER PUMP

VOLTS : 24 VDC
AMP : 2.5 A
INLET PRESSURE : 80 PSI
NOMINAL FLOW RATE : >5.0 L /MIN
WORKING PRESSURE : 100 PSI
MAX. PUMP OUTPUT : 160 PSI

MODEL NO. 300 GPD

Water Quality
AN ISO 9001:2008 COMPANY

This pump is designed for The Reverse Osmosis Water Purification System.
Read carefully about the Specification for other Applications.

★★★★★ **1** ★★★★★
YEAR WARRANTY

AQUASTIC


INLINE FILTER CARTRIDGE

100%

FOOD GRADE PLASTIC
LEAKAGE PROOF MATERIAL

SEDIMENT FILTER
5 MICRON PP SPUN

CARBON FILTER
900IV COCONUT ACTIVATED CARBON

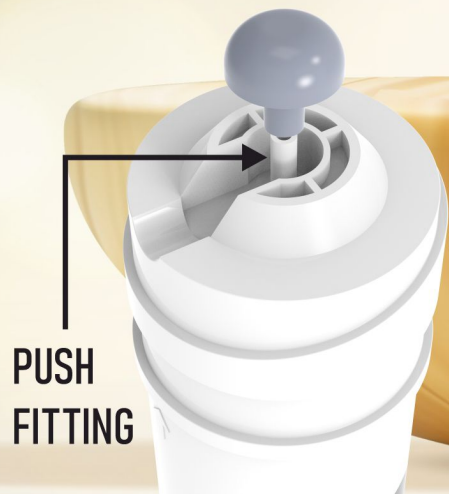

PUSH
FITTING

AQUASTIC

INLINE FILTER CARTRIDGE

A Connection With
Purity

SEDIMENT FILTER

5 MICRON PP SPUN

CARBON FILTER

700IV COCONUT ACTIVATED CARBON



**PUSH
FITTING**



COPPER & ALKALINE


4" FILTER CARTRIDGE



UF & 4" FILTER MINERAL CARTRIDGE



SOLENOID VALVE

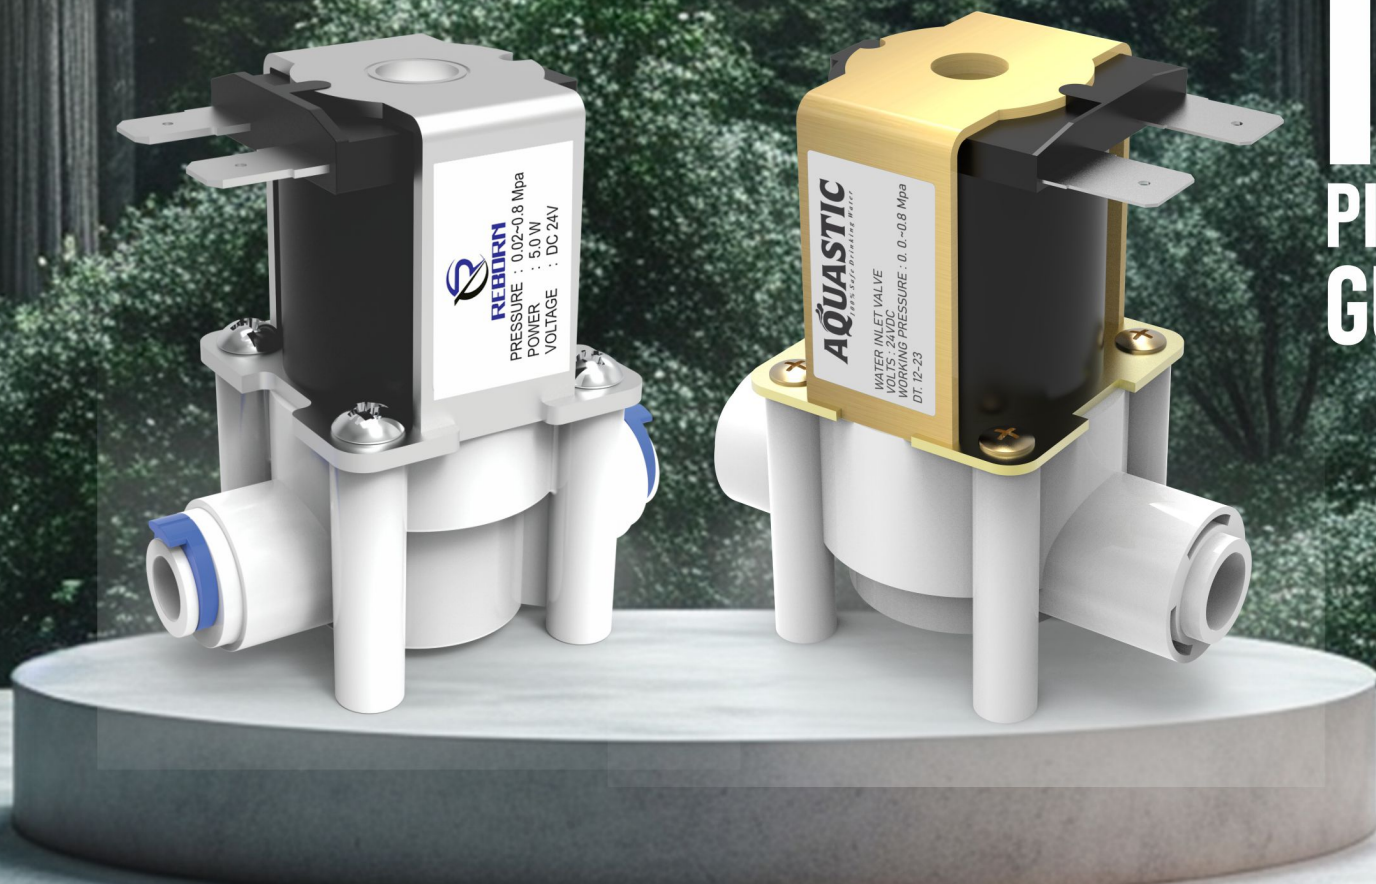

REBORN
PRESSURE : 0.02-0.8 Mpa
POWER : 5.0 W
VOLTAGE : DC 24V

AQUASTIC
WATER INLET VALVE
VOLTS : 24VDC
WORKING PRESSURE : 0.0-0.8 Mpa
DT. 12-23

1 YEAR
PIECE TO PIECE
GUARANTEE

RO SMPS 24V / 2.5A

13 Months Guarantee



GOLD

CLASSIC

FILTER HOUSINGS

100% Virgin Food Grade Material
Non leakage Guarantee



RO + ALKALINE + POST CARBON COPPER



Low water pressure switch
Imported pump 100 Gpd
Heavy food grade cabinet

Imported wave cyber membrane 13 layers
Standard quality Inline
Air Tight Water Storage Tank

RO + ALKALINE + POST CARBON COPPER



Low water pressure switch
Imported pump 100 Gpd
Heavy food grade cabinet

Imported wave cyber membrane 13 layers
Standard quality Inline
Air Tight Water Storage Tank

AURA

RO + UV + CU + ALK



SMART
LED
INDICATOR

GRETA

RO+UV+CU+ALK

SMART
LED
INDICATOR



COMMERCIAL RO PLANT



25 LPH



50 LPH



100 LPH

INDUSTRIAL RO PLANT



500 LPH



250 LPH

IMPORT PRODUCTS

TAPS



CLAMPS



ANTISCALANT BALLS



CTO

GAC

FLOAT VALVE



FR : 350 / 450 / 550 / 800



100 % Original

FLOW RESTRICTOR



QC Fittings

FR : 350 / 450 / 550



TEFLON TAP 10 / 15 mtr.



TDS ADJUSTER VALVE



SOLENOID VALVES



SV HERO 24V / 36V



SV SLX 24V / 36V



YONG CHANG 24V / 36V

FAUCETS



SPANNER



BODEER 波得尔 BODEER FITTINGS






P C ENTERPRISES

 Near hanuman Mandir , Vyamshala Chowk,
Ganeshpeth , Nagpur

 pcenterprises007@gmail.com

 www.aquastic.in

 +91 93732 76341
91756 05826

